

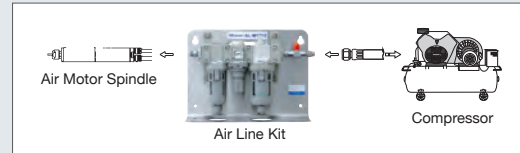




SERIE MA Ø30 mm

MA Series ø1.18" (ø30 mm) System Chart

- MA Series has been designed to operate smoothly at high speed for long continuous cutting and grinding by connecting an air line kit directly between the air compressor and the air motor. (Air Line Kit Refer to 3-p25 in detail)
- Air supply and exhaust air hoses are supplied with an air motor. Air supply hose is provided with metal fitting to connect to ø6 mm one-touch joint. Air exhaust hose is supplied with silencer.

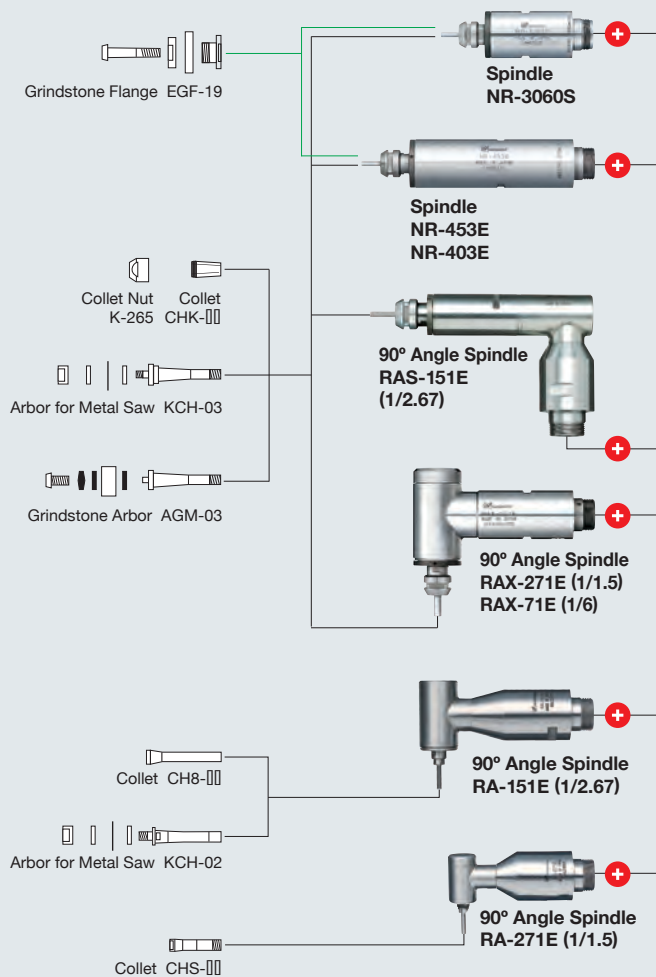

*May be connected between the motor and the spindle as the need of torque.
 *(1/00) indicates reduction ratio.
 *Reduction Gears can be used only with NR-3060S, NR-453E, and NR-403E.

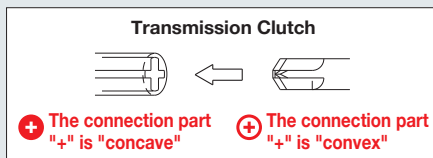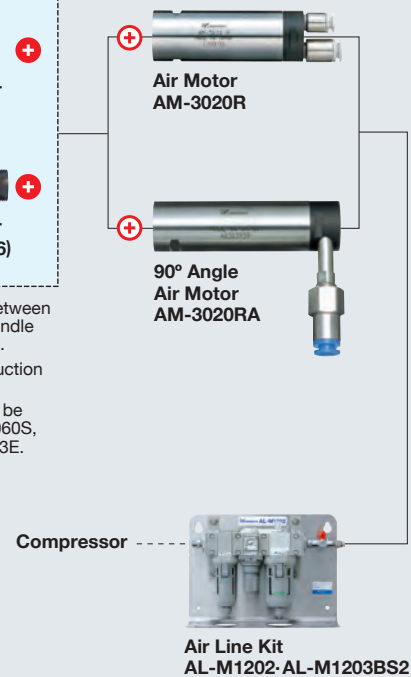

*Do not exceed the maximum motor speed recommendation for the spindles. Excess speed will dramatically reduce bearing life.

AM-3020R Torque-Speed Characteristics

